



DDX 9121a-n

Simultaneous Partial Discharge (PD) & Radio interference voltage (RIV) Detector



The DDX 9121a-n **partial** discharge & radio interference voltage (RIV) detector is the latest in the DDX family of PD detection equipment. It's our solution for simultaneous multi-phase partial discharge & radio interference voltage testing. With the DDX 9121a-n you can setup, control, test, monitor and generate test reports from a single computer. Its modular design makes possible to add additional channels.

The DDX 9121a-n comprises multiple rack-mounted units communicating with a remote PC, which handles the display of PD information using the DDX 9121/SWR data acquisition and remote control software. The detector is controlled from the PC via an Ethernet link. The PC displays test-results, provides means of calibrating the system and logging of the results into a test report. The reports can then be printed out from the software or displayed as a web page. With help of the software the user can also export the results for use in a spreadsheet. Software also provides bitmaps for inclusion in other reports.

Multiple, independent channels mean inherent redundancy in case of a failure of a plug-in. The channels can be used in multiple configurations together or as stand-alone detectors.

FEATURES

- Phase resolved displays of each phase
- Real time measurement and display of all phases under test simultaneously
- Data acquisition and test reporting
- Multiple, independent rack mounted units
- Automatic synchronization to a motor generator set
- Standard and customized test report generation
- Upgradeable at any time by adding additional channels

BENEFITS

Simultaneous PD and RIV testing –The system allows simultaneous PD and RIV testing of transformer and thus reduces the testing time by half.

IEC and IEEE/ANSI compatible PD and RIV testing – The system hardware can be set to make measurements as per the frequency filter settings laid out in the latest versions of either the IEC or the IEEE /ANSI standards,

RIV Testing – RIV measurements are compatible with the legacy instruments designed as per NEMA 107-1987 and thus can ideally replace them with no measurement "surprises" as seen with other contemporary systems in the market.

Pattern Acquisition and Display – The system allows true parallel acquisition of the partial discharge activity on all the multiple channels with simultaneous display and recording of the classical elliptical and 3-dimensions patterns.

APPLICATIONS


Testing of:

- Distribution Transformers
- Power Transformers

REAL TIME MULTI-PHASE MEASUREMENTS

The DDX®9121a multi-channel PD system provides **simultaneous** phase resolved displays of the PD activity at any given moment during the test. A user can use this information to characterize and possibly locate the origin of discharge sources.

A chart recorder provides a hard copy of partial discharge level versus voltage and testing time for each channel in one customized graph. Any time during the test the partial discharge levels can be monitored and after the completion of the test, **customized test reports** for the multiple channels can be generated automatically populated with snap-shots from interesting events.

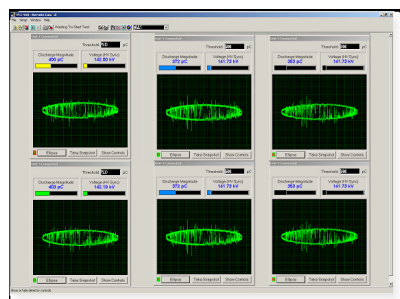

Display Screen DDX®9121 with 6 active partial discharge measurement channels



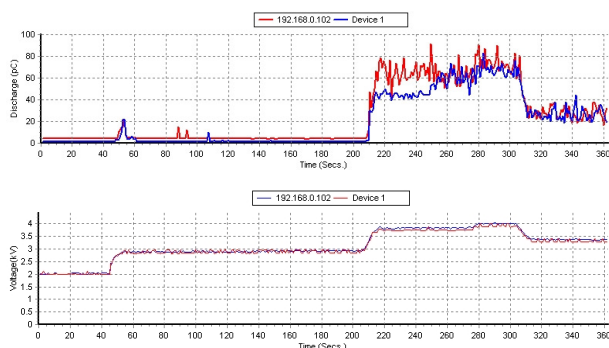


Chart Recorder with graphs PD vs. voltage and time


RIV MEASUREMENTS

The DDX 9121a-n provides as an option RIV measurement according to ANSI and NEMA 107-1987. This permits replacement of outdated RIV measurement instruments without any measurement reading "surprises" seen with other contemporary equipments in the market.

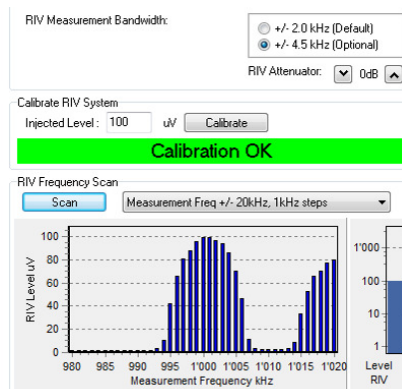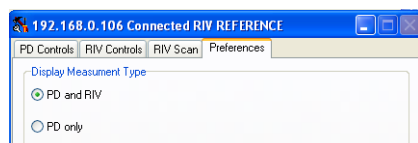

Freq scan to identify the noise free RIV meas. Freq.


RIV calibration as per the de-facto industry standard – ANSI +NEMA

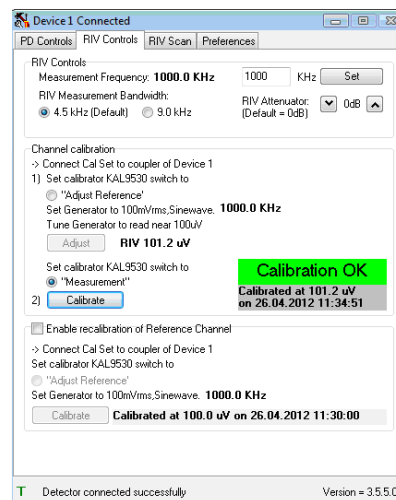


PATTERN ACQUISITION AND ANALYSIS MODULE

With the pattern acquisition and analysis module, several two- and three-dimensional PD pulse patterns of all the monitored channels can be simultaneously displayed and recorded. Snap shots of the 3D patterns can be saved into a windows gallery for further uses like customised test report generation or to export them as image files.

Data filters and time-sliced views further permits a detailed look at the PD pattern as deep as every cycle of the applied test voltage and in certain cases, helps separate and identify noise interferences.

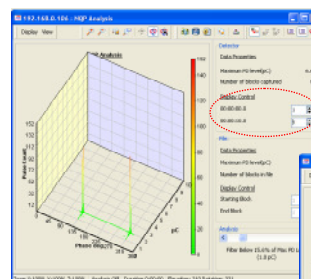

PD Pattern

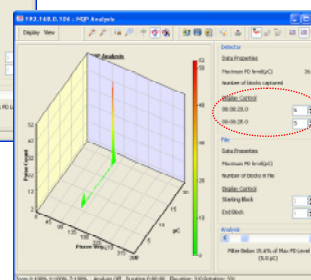

Noise Pattern

Haefely is a subsidiary of Hubbell Incorporated.



a brand of

HAEFELY



Technical specifications

Amplifier

Gain(Attenuation)	0 dB to 75 dB in 5 dB steps
Attenuator Accuracy	1 %
Gain	9000
Input Impedance	50 Ω
System Noise	< 12 μ V referred to input on highest gain range
Filters (IEC)	High Pass - 30, 50, 60, 80 kHz Low Pass - 100, 200, 300, 400, 500 kHz
Filters (IEEE)	100 to 300 kHz* [If this setting is desired, please inform us during ordering stage as this entails hardware modification]

PD Measurement

PD Meter Resolution	10 bits displayed
PD Capture	8 bits (7 plus sign)
Phase Resolution	0.1 %
Linearity Error	< 1 %

Voltage Measurement

Uncertainty of Scale Factor	< 1 %
Linearity (10-100% FS)	< 1 %
Resolution	11 bits
Measurement modes	Peak / $\sqrt{2}$ true RMS
Synchronization	Local Mains, HV source (automatic)
Sync Lock range	20 Hz to 400 Hz

Mechanical (per channel)

Weight	3 kg
Dimensions	19" 3HU case, 340 mm deep
Power Supply	100-240 V, 40-70 Hz

Environmental

Operating Temp Range	0 to 40 °C
Storage Temp Range	-10 to 75 °C
Humidity Range	95% non-condensing

Ethernet Port

Isolated	100BaseT
----------	----------

(Note: Optically isolated cable for connection to LAN is recommended)

RIV measurement

Measurement frequency range	850 to 1150 kHz
Bandwidth	9 KHz (- 6 dB)
Output level	1uV onwards
RIV system linearity (1 range)	< 2 % FSD

Applicable Standards

IEC-60060 Parts 1&2	ICEA T-24-380
IEC-60270	ASTM D1868-93
IEC-885-2 and 885-3	ANSI C57.113
IEEE Std. 4, 1995	ANSI C57.124-91
ANSI C63.2-1996	NEMA 107

ORDERING INFORMATION

System

1. PD Detector System including # pcs. of 9121a detector inserts, mounted in rack with desk, 20m twin VM and PD input cables, manual and calibration certificates

Options

- Laptop computer
- RIV measurement board
- Optically isolated LAN cable

Accessories for PD testing

a brand of

HAEFELY



Haefely is a subsidiary of Hubbell Incorporated.



Accessories for PD testing

CALIBRATORS

KAL 451



The KAL 451 is a battery powered PD calibrator for direct coupling of the generated PD signal to the test object according to the related standards IEC 60270 and IEEE 454. Pulse outputs ranges are 2 – 200pC and 20 – 2000pC. The pulse rise time is < 20ns.

9216



The 9216 is a small battery powered PD calibrator for direct coupling of the generated PD signal to the test object according to the related standards IEC 60270 and IEEE 454. Pulse outputs ranges are 10, 100, 1'000, 10'000 pC.

KAL 9530



The RIV calibrator (KAL 9530) includes a signal generator, RIV calibration set, clamp and a switching unit for calibration as per ANSI and NEMA standard.

PD SIMULATORS

753-US



The Miniature Partial Discharge Simulator is a compact, battery operated discharge simulator. It injects a known multiple pulse PD signal into a PD test circuit to allow verification of calibration. The unit also incorporates a fine frequency control for synchronizing to a multiple of the mains frequency.

MEASURING IMPEDANCES

AQS 9110a



The AQS 9110 Passive quadripole is a fully configurable quadripole system optimized for PD and RIV measurement. It has a voltage divider low-arm fitted to it for voltage measurement.

COUPLING CAPACITORS

TK series



The coupling capacitor / HV AC divider consists of 1 unit, built into a glass fibre reinforced epoxy tube. The top electrode allows partial discharge free. For PD measurements an appropriate coupling quadripole must be added.

PSF



PSF (Power Separation Filter) have high self resonant frequencies, high stability and low partial discharge levels. They are mounted on a base with a suitable top electrode and a low voltage arm. Outputs are provided for PD detector input, overload sensing circuit, pulse mark (indicates zeros in AC wave shape) and kilo voltmeter input. Not suitable for RIV measurements.

Europe, Asia, South & Central America, Australia

Haefely Test AG
Birsstrasse 300
4052 Basel
Switzerland
☎ +41 61 373 4111
✉ +41 61 373 4912
✉ sales@tettex.com

www.tettex.com

China (Sales & Service Office)

Haefely Test AG – Beijing Office
8-1-602, Fortune Street
No. 67, Chaoyang Road, Chaoyang District
Beijing, 100025
P. R. China
☎ +86 10 8578 8099
✉ +86 10 8578 9908
✉ sales@haefely.com.cn

North America

Hipotronics Inc.
1650 Route 22
PO Box 414
Brewster, NY 10509
USA
☎ +1 845 279 3644
✉ +1 845 279 2467
✉ sales@hipotronics.com

a brand of

HAEFELY 


precision.
swiss made.

Haefely is a subsidiary
of Hubbell Incorporated.

