




# TYPE CS

## Damped Capacitive Impulse Voltage Divider

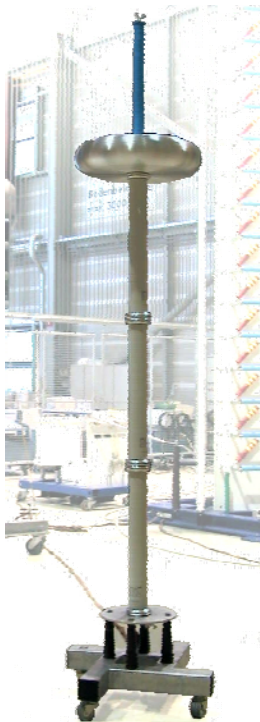

CS 800-670

### APPLICATIONS

The damped-capacitive impulse voltage dividers series CS can be used to measure full lightning impulse voltages, tail chopped impulse voltages, switching impulses and AC voltages. They meet all requirements of IEC 60060-2 (1994), in particular those with respect to measuring accuracy and step response. At the same time they can be used as a basic load for impulse voltage generators.

### DESIGN

Depending on the voltage rating, the high voltage part of the dividers consists of 1, 2 or 3 oil-filled capacitors which are housed in glass fiber reinforced cylinders. The damping resistance is placed as an external resistor on top of the uppermost capacitor.

Above 600 kV (included) rated lightning impulse voltage the dividers are equipped with a toroidal high voltage electrode to guarantee corona-free operation.

The secondary unit consists of a capacitor and a damping resistor of low inductance both arranged in a coaxial design. The unit is fixed at the bottom of the divider and can easily be disassembled. The voltage divider is erected on a four-arm base equipped with castors.

### TECHNICAL DATA

The type designation consists of the characters CS and two figures, e.g. CS 400-1000 the first figure represents the max. lightning impulse voltage in kV, the latter the capacitance in pF.

Type	Rated impulse voltage L.I. 1.2 / 50 $\mu$ s kV	Rated impulse voltage S.I. 250 / 2500 $\mu$ s kV	Rated AC voltage, 50/60 Hz, cont. duty * kV RMS	Capacitance pF	Damping res. ext. $\Omega$	Clearance to walls and ceiling m
CS 100-1000	100	100	50**	1000	130	1.5
CS 200-1000	200	200	50**	1000	130	1.5
CS 300-1000	300	280	50**	1000	130	1.5
CS 400-1000	400	320	100	1000	130	1.5
CS 500-500	500	400	70**	500	270	2.3
CS 600-500	600	500	140	500	270	2.3
CS 700-500	700	560	140	500	270	2.3
CS 800-670	800	650	210	670	230	3.5
CS 900-670	900	700	210	670	230	3.5
CS 1000-670	1000	750	250	670	230	3.5

\* with adequate additional secondary part type SEK W.

\*\* higher voltages possible only with additional top electrode

a brand of

**HAEFELY** 

  
precision.  
swiss made.

Haefely is a subsidiary  
of Hubbell Incorporated.





## DIMENSIONS & WEIGHT (APPROX.)


Type	Height m	Base frame m	Net weight kg	Gross weight sea kg	Shipping volume m3
CS 100-1000	1.4	0.6	43	85	0.3
CS 200-1000	1.4	0.6	43	85	0.3
CS 300-1000	1.4	0.6	43	85	0.3
CS 400-1000	1.4	0.6	43	85	0.3
CS 500-500	2.2	0.6	50	130	1.0
CS 600-500	2.2	0.6	56	130	1.0
CS 700-500	2.2	0.6	56	130	1.0
CS 800-670	3.5	1.0	85	150	1.5
CS 900-670	3.5	1.0	85	150	1.5
CS 1000-670	3.5	1.0	85	150	1.5

## DIVIDER RATIO

The divider ratio is designed to achieve an output voltage of approx. 1400 V at rated lightning impulse voltage. This value was chosen as the standard input voltage for impulse measuring systems from Haefely Test in order to reduce the influence of electromagnetic interferences. Upon request the dividers can be supplied with other ratios or with an attenuator to match the input voltage of other measuring devices.

## STEP RESPONSE

The unit step response of the dividers is adjusted to meet the requirements of IEC 60060-2 (1994):

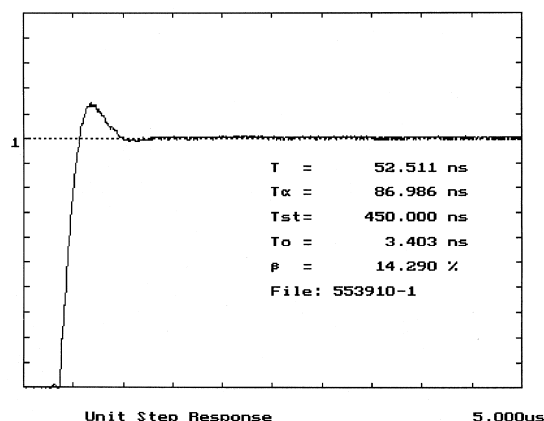

*Typical step response of divider type CS 300 kV, 1000 pF*

[www.haefely.com](http://www.haefely.com)

### Europe, Asia, South & Central America, Australia

Haefely Test AG  
Birsstrasse 300  
4052 Basel  
Switzerland  
☎ + 41 61 373 4111  
☎ + 41 61 373 4912  
[sales@haefely.com](mailto:sales@haefely.com)

a brand of

**HAEFELY** 



### China (Sales & Service Office)

Haefely Test AG – Beijing Office  
8-1-602, Fortune Street  
No. 67, Chaoyang Road, Chaoyang District  
Beijing, 100025  
P. R. China  
☎ + 86 10 8578 8099  
☎ + 86 10 8578 9908  
✉ [sales@haefely.com.cn](mailto:sales@haefely.com.cn)

### North America

Hipotronics Inc.  
1650 Route 22  
PO Box 414  
Brewster, NY 10509  
USA  
☎ + 1 845 279 3644  
☎ + 1 845 279 2467  
✉ [sales@hipotronics.com](mailto:sales@hipotronics.com)

Haefely is a subsidiary  
of Hubbell Incorporated.

